

Elevation Innovation Inc.

TITLE: INTELL-LIFT 500  
DOORS - FRONT BACK  
36" W x 36" D x 48" H 500 lb. Capacity

REVISIONS

REV	DESCRIPTION	DATE	BY


STOPS: 2  IN-LINE  OPP.  
 OPENINGS: 2 @ LOWER, UPPER.  
 TRAVEL: I.B.O.

<input checked="" type="checkbox"/> FRONT BACK	<input checked="" type="checkbox"/> DR/WALL CONSTRUCTION
<input type="checkbox"/> SLIDE-UP	<input type="checkbox"/> MASONRY CONSTRUCTION
<input type="checkbox"/> FLOOR LOADING	<input type="checkbox"/> PLAIN STEEL - PRIMED
<input type="checkbox"/> HOISTWAY DOORS	<input type="checkbox"/> STAINLESS STEEL - #4
<input type="checkbox"/> FUSIBLE LINK	<input type="checkbox"/> COUNTER LOADING
<input type="checkbox"/> 1 1/2 HR U/L "B" LABEL	
<input type="checkbox"/> EMERGENCY RELEASE	
<input type="checkbox"/> NON-PLUGGABLE INTERLOCK	
<input checked="" type="checkbox"/> HG-1 SINGLE CONTACT DOOR LOCK & CONTACT NEMA 1	
<input type="checkbox"/> HG-2 DOUBLE CONTACT INTERLOCK NEMA 1	

JAMB MOUNTED 24V PUSHBUTTON STATIONS:  
 NON-ILLUMINATED  ILLUMINATED  
 BUTTONS:  UP  DOWN  1  2  3  
 LIGHTS:  CAR HERE  IN USE  
 HEADER MOUNTED 24V CAR ARRIVAL LIGHTS

CAR GATE	ALUMINUM	
ACCESS DOOR	PLAIN STEEL	BY: EII

POWER SUPPLY: A LOCKABLE FUSED DISCONNECT MUST BE PROVIDED IN ACCORDANCE WITH LOCAL ELECTRICAL CODES. THE SUPPLY MUST BE A 220V, 20A DEDICATED CIRCUIT.  
 DOORS: DOORS MUST MEET LOCAL FIRE CODE. INTERLOCK DEVICES ARE PROVIDED AND MUST BE MOUNTED TO DOORS AS DIRECTED IN THE INSTALLATION GUIDE.

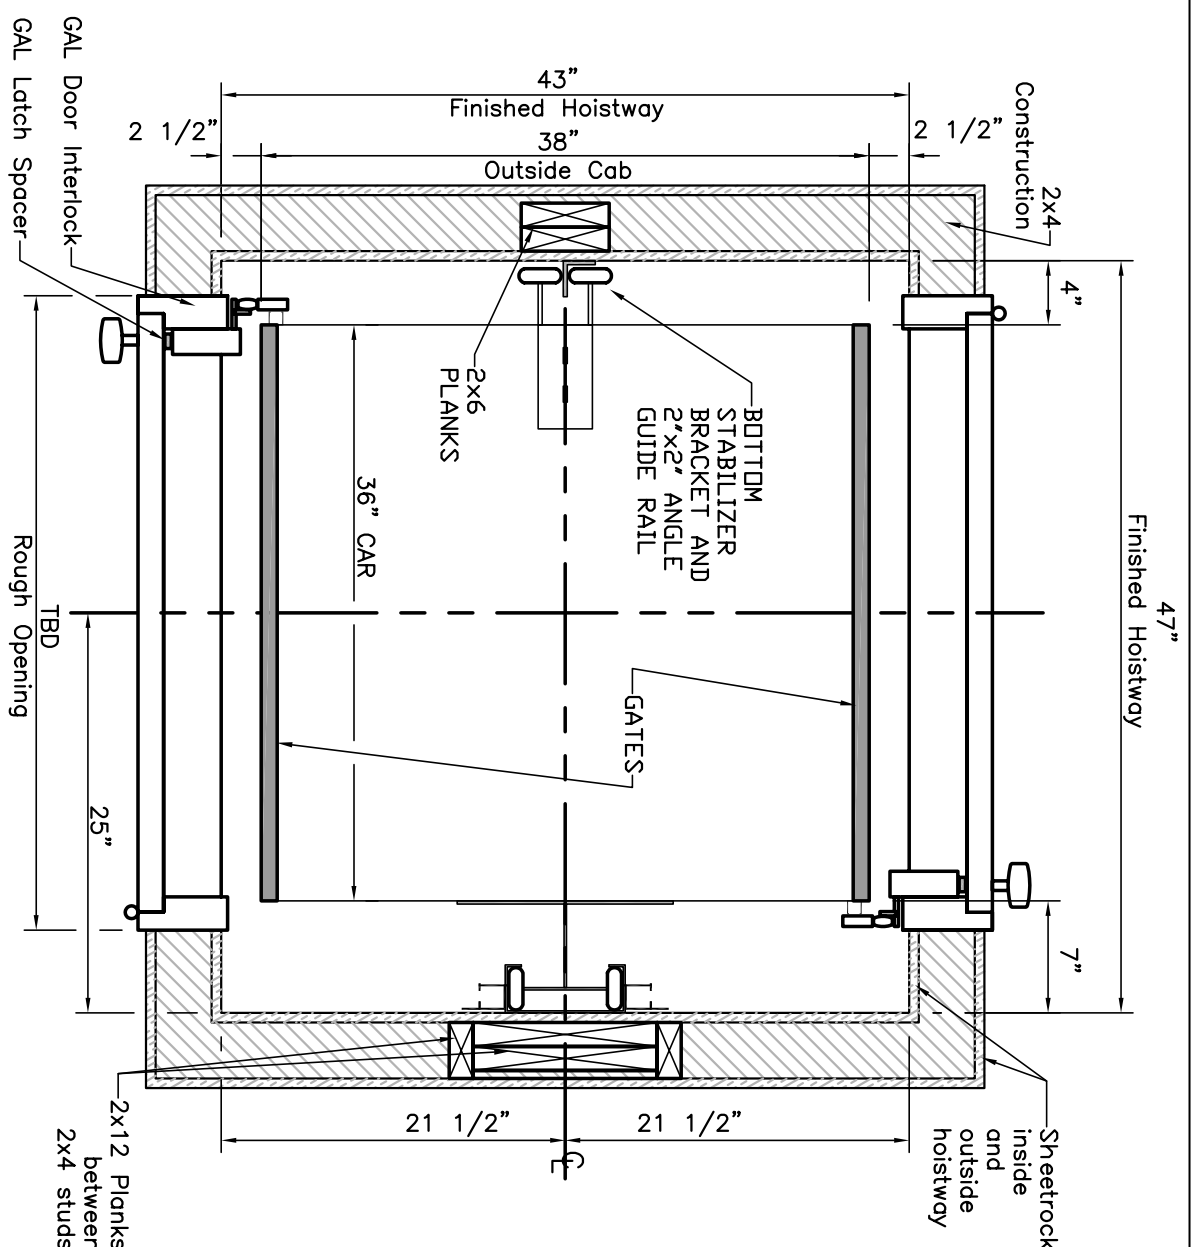


HOISTWAY: THE HOISTWAY MUST BE IN ACCORDANCE WITH "SAFETY CODE FOR ELEVATORS AND ESCALATORS" (ASME A17.1) AND ALL STATE AND LOCAL CODES.  
 PLUMB HOISTWAY: DUE TO CLOSE RUNNING CLEARANCES OWNER/AGENT MUST ENSURE THAT HOISTWAY IS PLUMB, AND SQUARE AND IS IN ACCORDANCE WITH DIMENSIONS ON THESE DRAWINGS.


REINFORCED WALL: THE RAIL WALL MUST BE REINFORCED WITH DOUBLE 2X12 PLANKS AS SHOWN ON THE DRAWINGS. THE MACHINE AND RAIL SYSTEM REQUIRES THESE 2X12 PLANKS FOR SUPPORT.  
 MACHINE ROOM: MACHINE ROOM MAY BE LOCATED WITHIN THE HOISTWAY ON THE BOTTOM FLOOR OR IN A CLOSET ADJACENT TO THE HOISTWAY (BEHIND THE RAIL WALL). THE MACHINE ROOM MUST HAVE A LOCKABLE ACCESS DOOR. THIS DOOR MUST REMAINED LOCKED AT ALL TIMES.

SHIP TO: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_  
 OPENING: FRONT/BACK  
 DWG NO. -----

JOB NAME:		DATE APPROVED:		SHEET	1 OF 2	DATE:	10/26/09
-----------	--	----------------	--	-------	--------	-------	----------

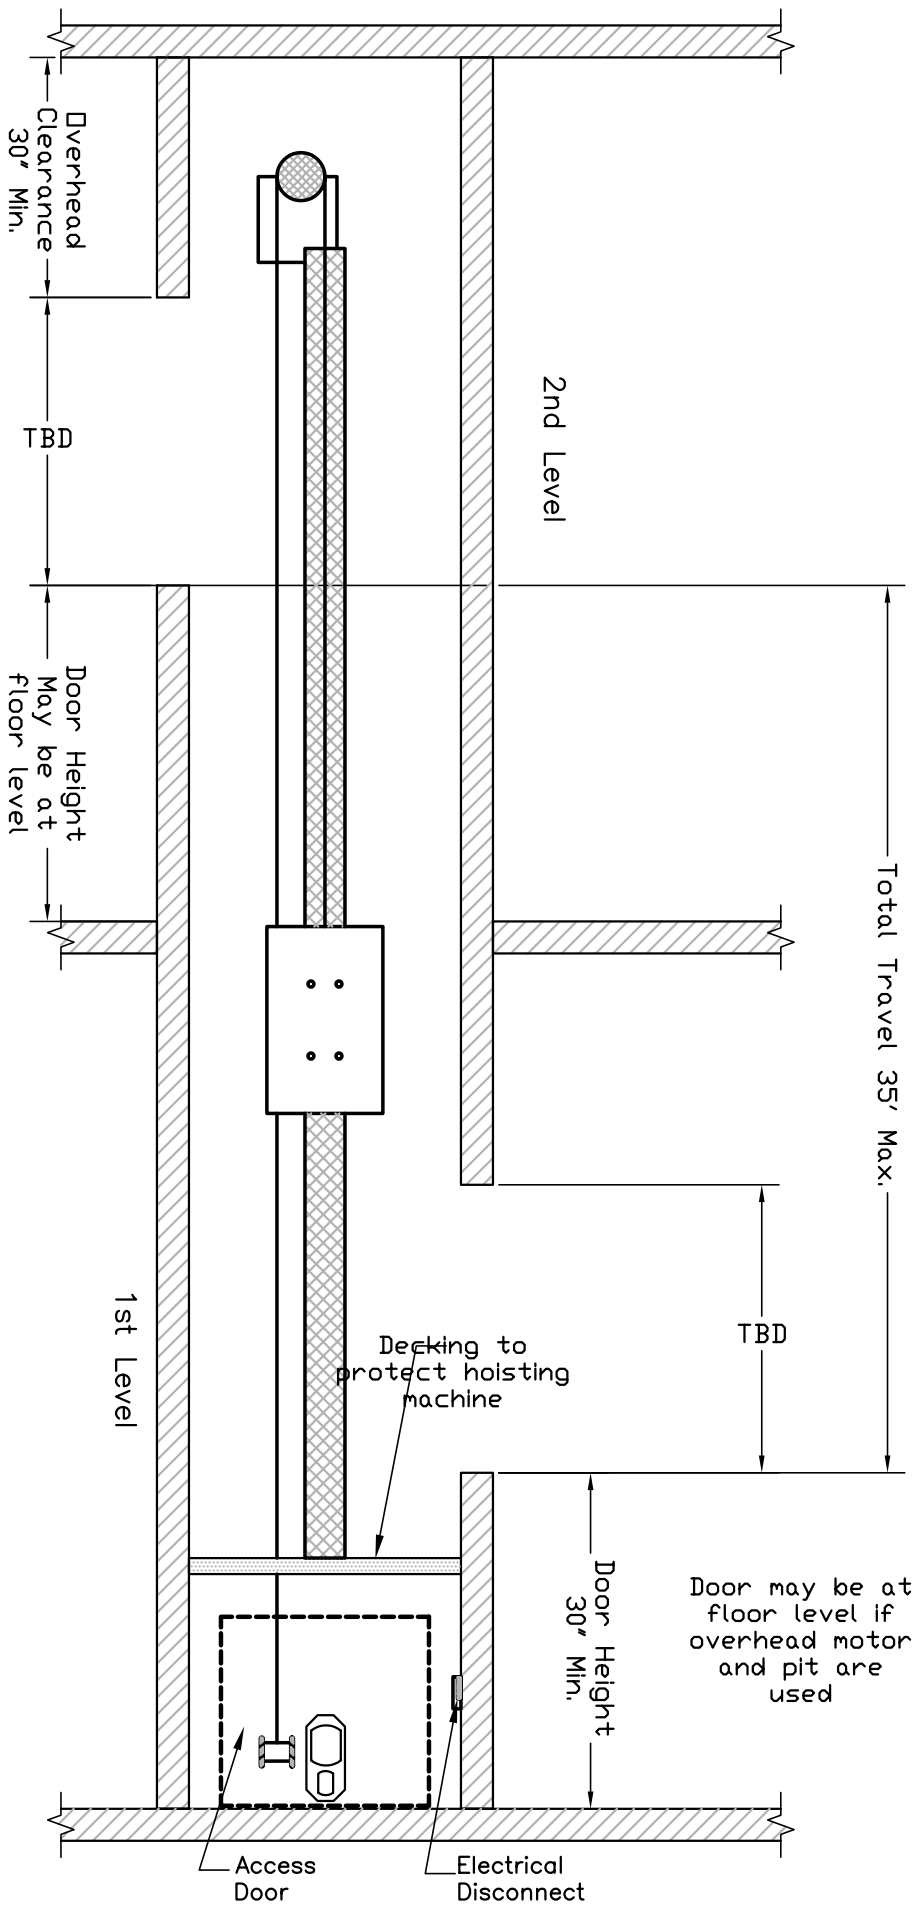

Door may be at floor level if overhead motor and pit are used

CUSTOMER:		SHIP TO:		APPROVED BY:		TITLE: DUMBWAITER SECTION ELEVATION "A-A"	
JOB NAME:		DATE APPROVED:		OPENING: SWING		SHEET 2 OF 2	
				DWG NO. RST FB2		DATE: 10/21/09	
 <b>Elevation Innovation Inc.</b>							