

TITLE: INTELL-LIFT PRO-RST DUMBWATER
 20X30X36
 BI PARTING SAME SIDE PLAN VIEW

| REV | DESCRIPTION | DATE | BY |
|-----|-------------|------|----|
| | | | |
| | | | |
| | | | |

STOPS: 2 IN-LINE OPP.
 OPENINGS: 2 @ LOWER, UPPER.
 TRAVEL: 18.0.

| | |
|---|--|
| <input checked="" type="checkbox"/> BI-PARTING | <input checked="" type="checkbox"/> DRYWALL CONSTRUCTION |
| <input type="checkbox"/> FLOOR LOADING | <input type="checkbox"/> MASONRY CONSTRUCTION |
| <input checked="" type="checkbox"/> COUNTER LOADING | <input type="checkbox"/> PLAIN STEEL - PRIMED |
| <input type="checkbox"/> HOISTWAY DOORS | <input type="checkbox"/> STAINLESS STEEL - #4 |


| |
|---|
| <input checked="" type="checkbox"/> EMERGENCY RELEASE |
|---|

| |
|--|
| <input checked="" type="checkbox"/> HG-1 SINGLE CONTACT DOOR LOCK & CONTACT NEMA 1 |
| <input type="checkbox"/> HG-2 DOUBLE CONTACT INTERLOCK NEMA 1 |

| | |
|--|--|
| WALL MOUNTED 24V PUSHBUTTON STATIONS: | |
| <input checked="" type="checkbox"/> NON-ILLUMINATED | <input type="checkbox"/> ILLUMINATED |
| BUTTONS: <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 | 3 |
| CAR GATE | BIRCH WOOD |
| <input checked="" type="checkbox"/> SLIDE-UP | <input checked="" type="checkbox"/> ALUMINUM |
| ACCESS DOOR | PLAIN STEEL |
| <input type="checkbox"/> WOOD | BY OTHERS |

DUMBWATER CAN BE INSTALLED THRU ROUGH OPENING HOWEVER INSTALLATION IS EASIER IF THE BOTTOM FLOOR DOOR WALL IS LEFT OFF UNTIL UNIT IS INSTALLED.

POWER SUPPLY: A LOCKABLE FUSED DISCONNECT MUST BE PROVIDED IN ACCORDANCE WITH LOCAL ELECTRICAL CODES. THE SUPPLY MUST BE A 115V, 20A DEDICATED CIRCUIT.
 DOORS: DOORS MUST MEET LOCAL FIRE CODE. INTERLOCK DEVICES ARE BUILT INTO DOORS

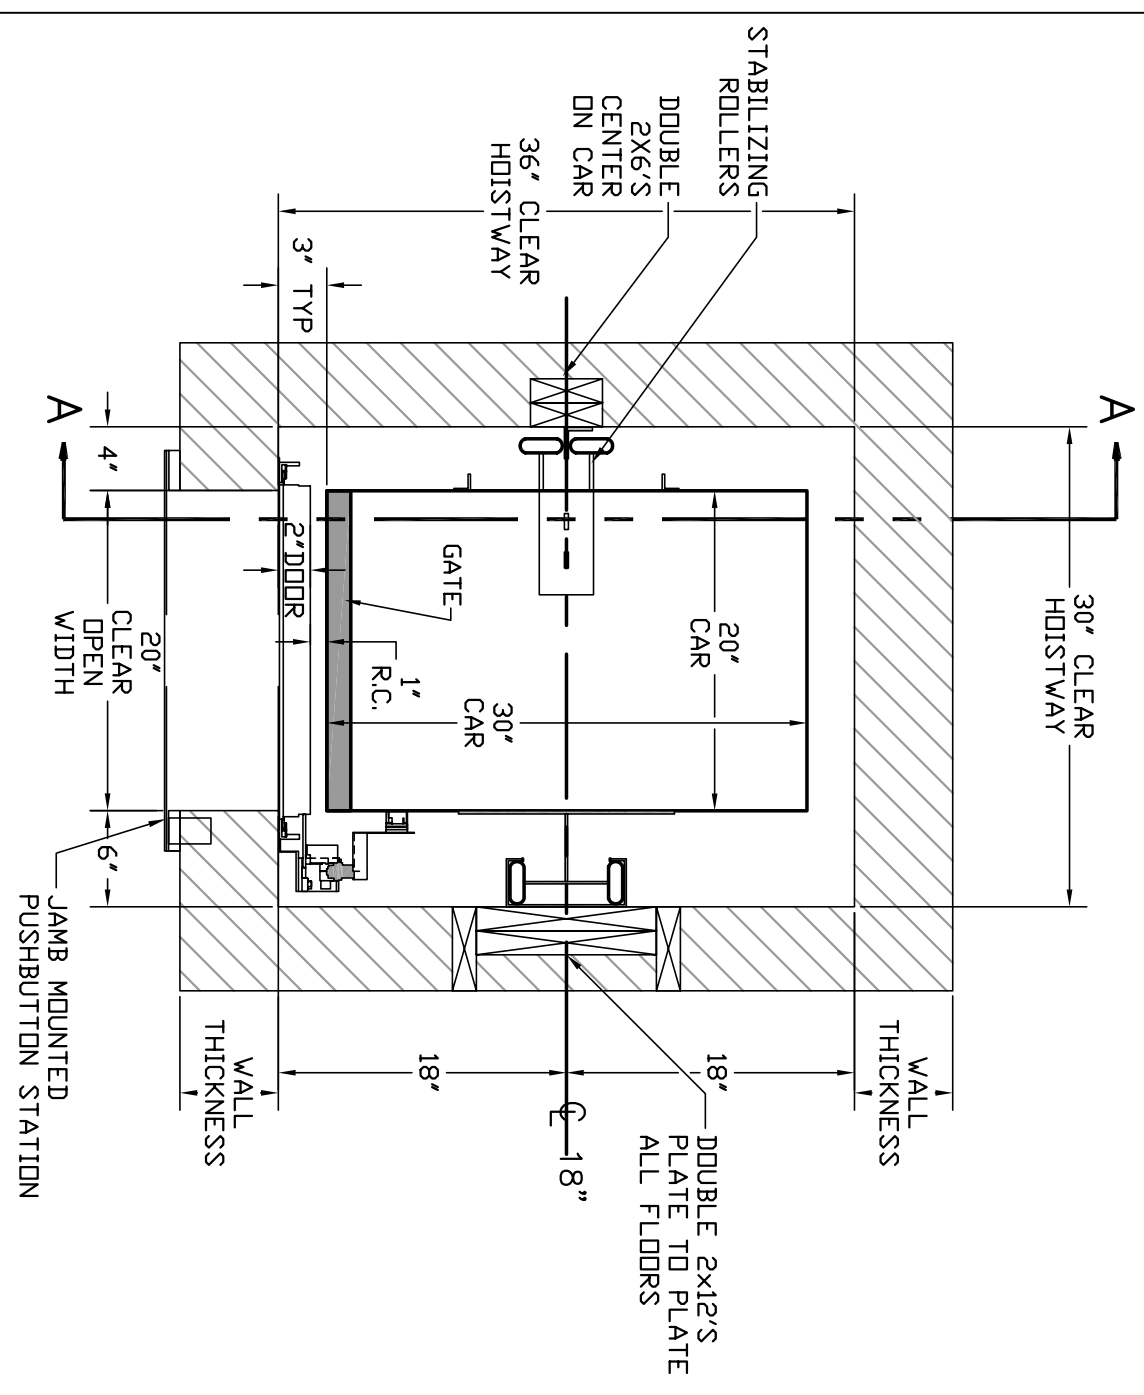

HOISTWAY: THE HOISTWAY MUST BE IN ACCORDANCE WITH "SAFETY CODE FOR ELEVATORS AND ESCALATORS" (ASME A17.1) AND ALL STATE AND LOCAL CODES.
 REINFORCED WALL: THE RAIL WALL MUST BE REINFORCED WITH DOUBLE 2X12 PLANKS AS SHOWN ON THE DRAWINGS. THE MACHINE AND RAIL SYSTEM REQUIRES THESE 2X12 PLANKS FOR SUPPORT.
 PLUMB HOISTWAY: DUE TO CLOSE RUNNING CLEARANCES OWNER/AGENT MUST ENSURE THAT HOISTWAY IS PLUMB, AND SQUARE AND IS IN ACCORDANCE WITH DIMENSIONS ON THESE DRAWINGS.
 MACHINE ROOM: MACHINE ROOM MAY BE LOCATED WITHIN THE HOISTWAY ON THE BOTTOM FLOOR OR IN A CLOSET ADJACENT TO THE HOISTWAY (BEHIND THE RAIL WALL). THE MACHINE ROOM MUST HAVE A LOCKABLE ACCESS DOOR. THIS DOOR MUST REMAINED LOCKED AT ALL TIMES.

CUSTOMER: _____ SHIP TO: _____ APPROVED BY: _____ OPENING: BI-PARTING SAME SIDE DWG NO. _____

JOB NAME: _____ DATE APPROVED: _____ SHEET 1 OF 2 DATE: 10/26/09

JOB NAME:

CUSTOMER:

SHIP TO:

APPROVED BY:

DATE APPROVED:


TITLE: DUMBWATER SECTION ELEVATION "A-A"

OPENING: BI-PARTING

SHEET 2 OF 2

DWG NO. RST FB2

DATE: 10/21/09



Elevation Innovation Inc.

